


Contract Electronics Manufacturing Services



Choose RoMaks, Go to the future



RoMaks limited
GOING TO THE FUTURE

Contents

Introduction	1
PCB Spacer supports	2
PCB Latches	8
LED Holders/spacers	12
Insulators	13
Rubber feet ad bumpers	15
Other product	16
Contact information	18

Introduction

 RoMaks limited
GOING TO THE FUTURE

On behalf of RoMaks Limited, I am pleased to welcome you to our catalog.

RoMaks is a Hong Kong-based company specializing in electronic component accessories—such as PCB hardware, spacer standoffs, LED supports, fasteners, connectors, and cable assemblies. In addition, we supply a broad range of electronic components including ICs, semiconductors, and related parts, enabling us to serve as a one-stop partner for our customers.

Beyond our standard product range, RoMaks provides customized solutions. We can produce special components according to customer datasheets, technical drawings, or specific requirements, and are able to design and propose moulds to meet unique applications. This flexibility allows us to support both large-scale production and specialized, customer-driven designs.

Our mission is to combine quality manufacturing, reliable sourcing, and global distribution, delivering products that meet the highest standards of precision and consistency. With strong stock availability and customization capability, RoMaks is trusted by electronics manufacturers, design houses, and distributors worldwide.

As CEO, I believe sustainable partnerships are built on trust, responsiveness, and technical expertise. At RoMaks, we are committed not only to delivering components, but also to offering engineering support, tailored solutions, and dependable logistics.

We invite you to explore our catalog, discover our solutions, and connect with us for collaboration. Together, we can strengthen the backbone of electronic innovation.

Sincerely,
Vitalii Kutepov
Director
RoMaks Limited

<https://romaks.ltd>

Email: sales@chipfasteners.com

RoMaks website: www.chipfasteners.com

Sales : sales@chipfasteners.com


Spacer supports

1. Brass/Metal HEX Standoffs – Precision Threaded Spacers for Mechanical & PCB Assemblies

Brass HEX standoffs are durable, corrosion-resistant spacers used to create precise gaps between components in mechanical assemblies and printed circuit boards (PCBs). Their hexagonal shape ensures easy installation with standard tools, while the metal construction offers high strength and stability. Available in a wide range of lengths, thread sizes, and finishes (nickel-plated optional), these standoffs are ideal for industrial, electronic, and prototyping applications.

1.1 RPCHSNX-XX - Female/Male Brass Hex Standoff (Optional Nickel Plated or Stainless Steel)

- * Thread Size: M2, M2.5, M3, M4, M5, M6 (Female/Male)
- * Material: Brass (Nickel-plated or Stainless Steel optional)
- * Shape: Hexagonal
- * Applications: PCB spacing, mechanical assemblies, electronics
- * Variants: Available in multiple lengths.

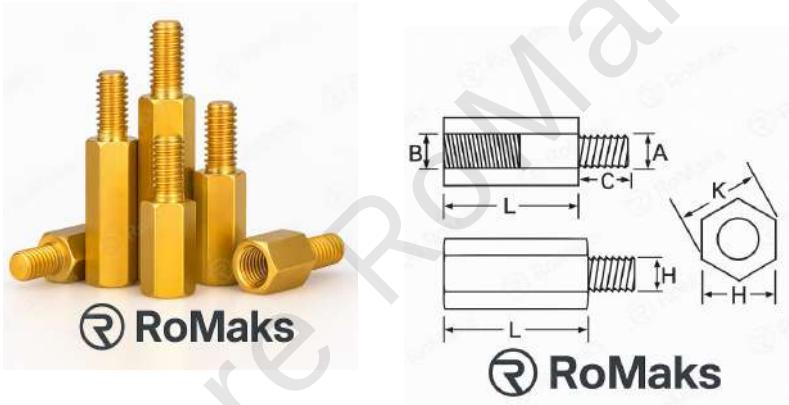

AVAILABLE THREAD SIZES


ORDER CODE: RPCHSNX-XX

(where X = Thread size, XX = Length in mm)

Example: RPCHSN2-10


	M2	M2.5	M3	M4	M5	M6
Length mm	5-51 mm	5-60 mm	5-90 mm	6-81 mm	10-90 mm	10-90 mm

RoMaks Spacer Support Availability Grid

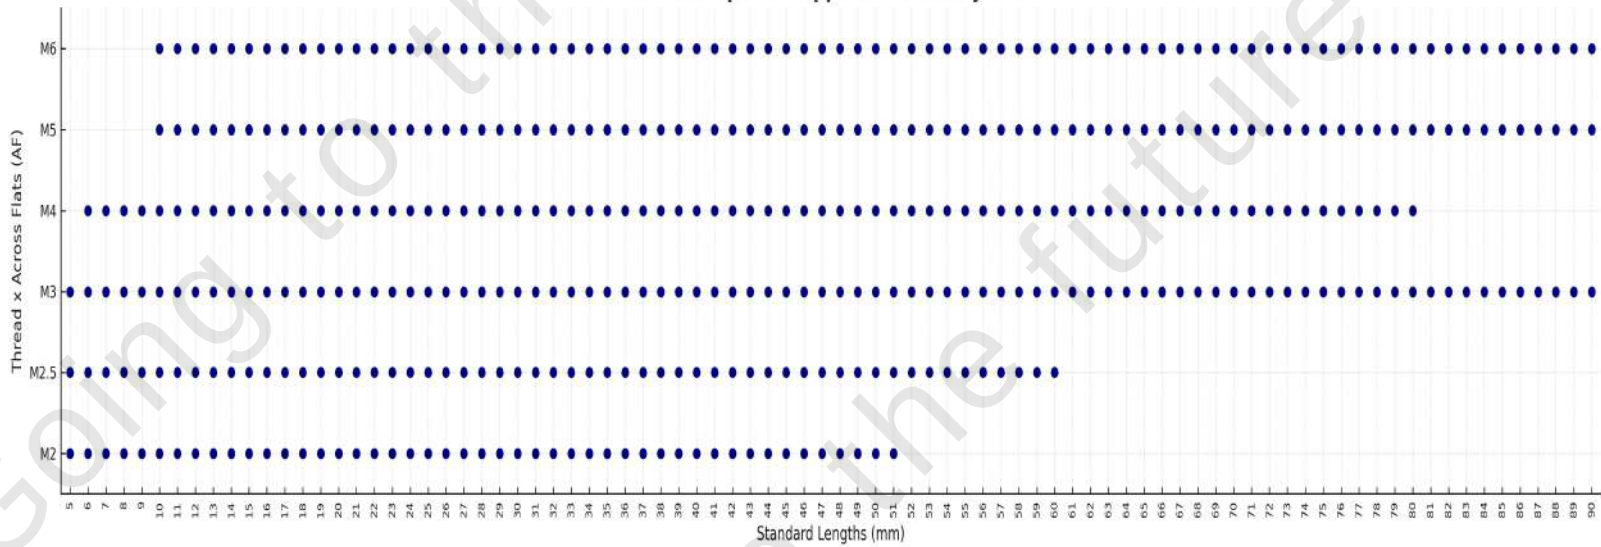

1.2 RPCHSSX-XX - Female/Female Brass Hex Standoff (Optional Nickel Plated or Stainless Steel)

- * Thread Size: M2, M2.5, M3, M4, M5, M6 (Female/Female)
- * Material: Brass (Nickel-plated or Stainless Steel optional)
- * Shape: Hexagonal
- * Applications: PCB spacing, mechanical assemblies, electronics
- * Variants: Available in multiple lengths.



AVAILABLE THREAD SIZES


ORDER CODE: RPCHSSX-XX

(where X = Thread size, XX = Length in mm)

Example: RPCHSS4-15


	M2	M2.5	M3	M4	M5	M6
Length mm	5-51 mm	5-60 mm	5-90 mm	6-81 mm	10-90 mm	10-90 mm

RoMaks Spacer Support Availability Grid

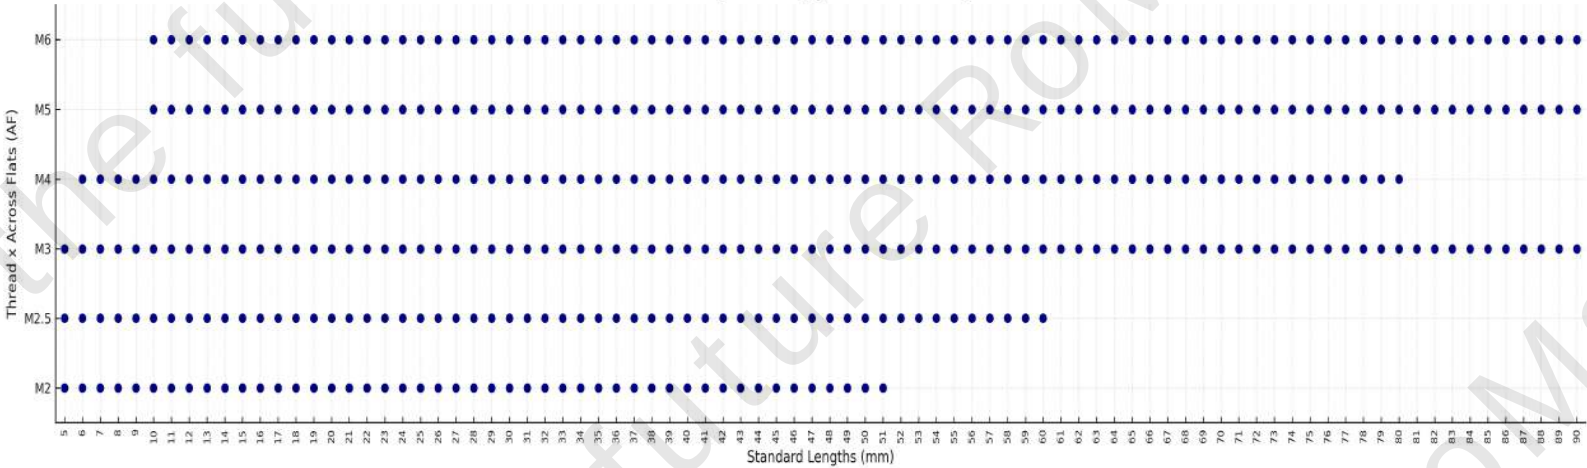

1.3 RPCHNNX-XX - Male/Male Brass Hex Standoff (Optional Nickel Plated or Stainless Steel)

- * Thread Size: M2, M2.5, M3, M4, M5, M6 (Male/Male)
- * Material: Brass (Nickel-plated or Stainless Steel optional)
- * Shape: Hexagonal
- * Applications: PCB spacing, mechanical assemblies, electronics
- * Variants: Available in multiple lengths.

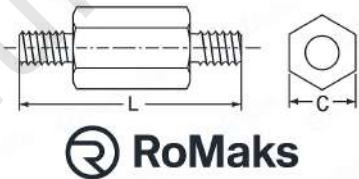

AVAILABLE THREAD SIZES

ORDER CODE: RPCHNNX-XX

(where X = Thread size, XX = Length in mm)

Example: RPCHNN3-08

	M2	M2.5	M3	M4	M5	M6
Length mm	5-51 mm	5-60 mm	5-90 mm	6-81 mm	10-90 mm	10-90 mm

1.4 RPCR Series - Cylindrical Knurled Brass Spacers


Description:

Cylindrical brass spacers with knurled body for secure grip.
Available in three types:

SN - Male/Female thread

SS - Female/Female thread


M2, M2,5 thread size, Length from 3mm to 35mm

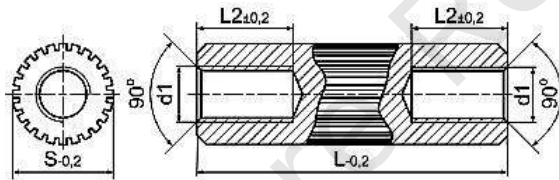

ORDER CODE: RPCRSSX-XX

(where X = Thread size, XX = Length in mm)

Example: RPCRSS2-12

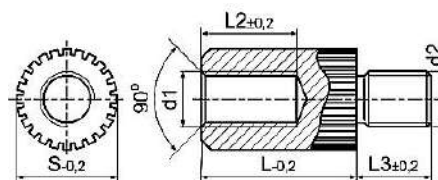

ORDER CODE: RPCRSNX-XX

(where X = Thread size, XX = Length in mm)


Example: RPCRSN2-10

2. Nylon HEX Standoffs – Lightweight Insulating Spacers

Durable and lightweight spacers made from flame-retardant nylon. Ideal for PCB separation, electrical insulation, and non-conductive applications. Their hexagonal shape allows easy tightening by hand or with a tool. Available in male/female, female/female configurations.


2.1 RTP series HEX nylon Standoff, male/female

- * Thread Size: M2, M2.5, M3, M4
- * Material: Nylon, white colour (can be customized by black colour)
- * Shape: Hexagonal
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

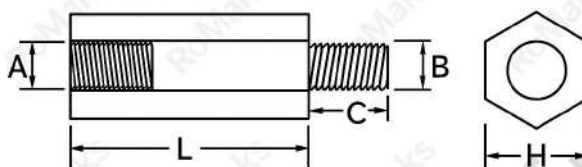

ORDER CODE	PITCH mm			Thread	SPQ
	L	C	H		
RTP2-	5	5	4	M2x0.4	500
	6				500
	8				500
	10				500
	12				500
	14				500
	15				500
	21				500
	28				500

ORDER CODE	PITCH mm			Thread	SPQ
	L	C	H		
RTP2.5-	5	5	4	M2.5x0.45	500
	6				500
	8				500
	10				500
	12				500
	14				500
	15				500
	21				500
	28				500





ORDER CODE	PITCH mm			Thread	SPQ
	L	C	H		
RTP4-	8	6	7	M4x0.7	500
	10				500
	11				500
	12				500
	13				500
	15				500
	18				500
	20				500
	22				500
	25				500

ORDER CODE	PITCH mm			Thread	SPQ
	L	C	H		
RTP3-	5	5	5	M3x0.5	500
	6				500
	8				500
	10				500
	12				500
	14				500
	15				500
	18				500
	20				500
	22				500
	25				500
	30				500
	35				500
	40				500




2.2 RHP series HEX neylon Standoff, female/female

- * Thread Size: M2, M2.5, M3, M4
- * Material: Nylon, white colour (can be customized by black colour)
- * Shape: Hexagonal
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

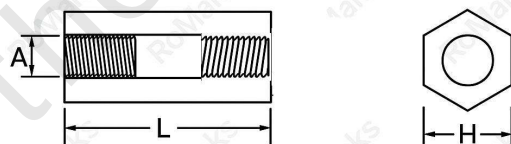

ORDER CODE	PITCH mm		Thread	SPQ
	L	H		
RHP2-	5	4	M2x0.4	500
	6			500
	8			500
	10			500
	12			500
	14			500
	15			500
	21			500
	28			500

ORDER CODE	PITCH mm		Thread	SPQ
	L	H		
RHP2.5-	5	4	M2.5x0.45	500
	6			500
	8			500
	10			500
	12			500
	14			500
	15			500
	21			500
	28			500




ORDER CODE	PITCH mm		Thread	SPQ
	L	H		
RHP4-	8	7	M4x0.7	500
	10			500
	11			500
	12			500
	13			500
	15			500
	18			500
	20			500
	22			500
	25			500

ORDER CODE	PITCH mm		Thread	SPQ
	L	H		
RHP3-	5	5	M3x0.5	500
	6			500
	8			500
	10			500
	12			500
	14			500
	15			500
	18			500
	20			500
	22			500
	25			500
	30			500
	35			500
	40			500


2.3 R series Round Nylon Spacers - Lightweight Insulating Separators

- * Inside diameter mm: 2.2, 2.6, 3, 3.2, 3.5, 4, 4.2
- * Material: Nylon-66, natural colour
- * Shape: Round
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C



ORDER CODE	A	SPQ
R2-1.8	1.8	2000
R2-2	2	2000
R2-2.5	2.5	2000
R2-3	3	2000
R2-3.2	3.2	2000
R2-4	4	2000
R2-4.3	4.3	2000
R2-5	5	2000
R2-5.3	5.3	2000
R2-6	6	2000
R2-7	7	2000




ORDER CODE	A	SPQ
R2-8	8	2000
R2-9	9	2000
R2-9.5	9.5	2000
R2-10	10	2000
R2-11	11	2000
R2-12	12	2000
R2-13	13	2000
R2-14	14	2000
R2-15	15	2000
R2-16	16	2000





ORDER CODE	A	SPQ
R2.6-2	2	2000
R2.6-3	3	2000
R2.6-4	4	2000
R2.6-5	5	2000
R2.6-6	6	2000
R2.6-7	7	2000
R2.6-8	8	2000
R2.6-9	9	2000

ORDER CODE	A	SPQ
R2.6-10	10	2000
R2.6-11	11	2000
R2.6-12	12	2000
R2.6-12	13	2000
R2.6-13	14	2000
R2.6-14	15	2000
R2.6-15	16	2000

ORDER CODE Ø 3	A	SPQ	ORDER CODE Ø 3.2	ORDER CODE Ø 3.5
R3-2	2	2000	R3.2-2	R3.5-2
R3-2.5	2.5	2000	R3.2-2.5	R3.5-2.5
R3-3	3	2000	R3.2-3	R3.5-3
R3-3.5	3.5	2000	R3.2-3.5	R3.5-3.5
R3-4	4	2000	R3.2-4	R3.5-4
R3-4.5	4.5	2000	R3.2-4.5	R3.5-4.5
R3-5	5	2000	R3.2-5	R3.5-5
R3-5.5	5.5	2000	R3.2-5.5	R3.5-5.5
R3-6	6	2000	R3.2-6	R3.5-6
R3-6.5	6.5	2000	R3.2-6.5	R3.5-6.5
R3-7	7	2000	R3.2-7	R3.5-7
R3-7.5	7.5	2000	R3.2-7.5	R3.5-7.5
R3-8	8	2000	R3.2-8	R3.5-8
R3-8.5	8.5	2000	R3.2-8.5	R3.5-8.5
R3-9	9	2000	R3.2-9	R3.5-9
R3-9.5	9.5	2000	R3.2-9.5	R3.5-9.5
R3-10	10	2000	R3.2-10	R3.5-10
R3-10.5	10.5	2000	R3.2-10.5	R3.5-10.5
R3-11	11	2000	R3.2-11	R3.5-11
R3-11.5	11.5	2000	R3.2-11.5	R3.5-11.5
R3-12	12	2000	R3.2-12	R3.5-12
R3-12.5	12.5	2000	R3.2-12.5	R3.5-12.5
R3-13	13	2000	R3.2-13	R3.5-13
R3-13.5	13.5	2000	R3.2-13.5	R3.5-13.5
R3-14	14	2000	R3.2-14	R3.5-14
R3-14.5	14.5	2000	R3.2-14.5	R3.5-14.5
R3-15	15	2000	R3.2-15	R3.5-15
R3-15.5	15.5	2000	R3.2-15.5	R3.5-15.5
R3-16	16	2000	R3.2-16	R3.5-16
R3-16.5	16.5	2000	R3.2-16.5	R3.5-16.5
R3-17	17	2000	R3.2-17	R3.5-17
R3-17.5	17.5	2000	R3.2-17.5	R3.5-17.5
R3-18	18	2000	R3.2-18	R3.5-18
R3-18.5	18.5	2000	R3.2-18.5	R3.5-18.5
R3-19	19	2000	R3.2-19	R3.5-19
R3-19.5	19.5	2000	R3.2-19.5	R3.5-19.5
R3-20	20	2000	R3.2-20	R3.5-20
R3-20.5	20.5	2000	R3.2-20.5	R3.5-20.5
R3-21	21	2000	R3.2-21	R3.5-21
R3-21.5	21.5	2000	R3.2-21.5	R3.5-21.5
R3-22	22	2000	R3.2-22	R3.5-22

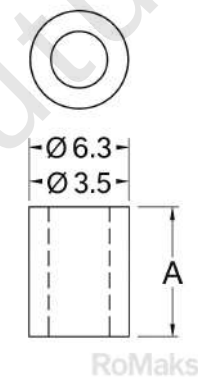



ORDER CODE Ø 4	A	SPQ	ORDER CODE Ø 4.2	ORDER CODE Ø 4	A	SPQ	ORDER CODE Ø 4.2
R4-2	2	2000	R4.2-2	R4-12.5	12.5	2000	R4.2-12.5
R4-2.5	2.5	2000	R4.2-2.5	R4-13	13	2000	R4.2-13
R4-3	3	2000	R4.2-3	R4-13.5	13.5	2000	R4.2-13.5
R4-3.5	3.5	2000	R4.2-3.5	R4-14	14	2000	R4.2-14
R4-4	4	2000	R4.2-4	R4-14.5	14.5	2000	R4.2-14.5
R4-4.5	4.5	2000	R4.2-4.5	R4-15	15	2000	R4.2-15
R4-5	5	2000	R4.2-5	R4-15.5	15.5	2000	R4.2-15.5
R4-5.5	5.5	2000	R4.2-5.5	R4-16	16	2000	R4.2-16
R4-6	6	2000	R4.2-6	R4-16.5	16.5	2000	R4.2-16.5
R4-6.5	6.5	2000	R4.2-6.5	R4-17	17	2000	R4.2-17
R4-7	7	2000	R4.2-7	R4-17.5	17.5	2000	R4.2-17.5
R4-7.5	7.5	2000	R4.2-7.5	R4-18	18	2000	R4.2-18
R4-8	8	2000	R4.2-8	R4-18.5	18.5	2000	R4.2-18.5
R4-8.5	8.5	2000	R4.2-8.5	R4-19	19	2000	R4.2-19
R4-9	9	2000	R4.2-9	R4-19.5	19.5	2000	R4.2-19.5
R4-9.5	9.5	2000	R4.2-9.5	R4-20	20	2000	R4.2-20
R4-10	10	2000	R4.2-10	R4-20.5	20.5	2000	R4.2-20.5
R4-10.5	10.5	2000	R4.2-10.5	R4-21	21	2000	R4.2-21
R4-11	11	2000	R4.2-11	R4-21.5	21.5	2000	R4.2-21.5
R4-11.5	11.5	2000	R4.2-11.5	R4-22	22	2000	R4.2-22
R4-12	12	2000	R4.2-12				


PCB Latches - Double Lock Nylon Spacers

Snap-in nylon spacers with double locking structure designed for quick and secure PCB mounting without screws or tools. Each latch features two flexible locking heads that hold firmly on both sides of the board. Made from flame-resistant nylon, ideal for insulating and spacing PCBs in electronic assemblies. Easy to install and remove, reducing assembly time.

3.1 RLCBY Series, round spacer, double locks.

ORDER CODE	A	SPQ
RLCBY-4.8	4.8(3/16)"	500
RLCBY-6.4	6.4(1/4)"	500
RLCBY-9.6	9.6(3/8)"	500
RLCBY-12.7	12.7(1/2)"	500
RLCBY-15.9	15.9(5/8)"	500
RLCBY-19.1	19.1(3/4)"	500
RLCBY-22.2	22.2(7/8)"	500
RLCBY-25.4	25.4(1)"	500
RLCBY-28.5	28.5(11/8)"	500

- * Chassis: Ø4.8
- * Thickness: 0.8~2.0
- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C




3.2 RLCD Series, round spacer, double locks.

- * Chassis: Ø3.5
- * Thickness: 0.8~2.0
- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C



Part No	A	Package
RLCD-3	3.2	2000
RLCD-4	4	2000
RLCD-5	4.8	1000
RLCD-6	6.4	1000
RLCD-7	7	1000
RLCD-8	8	1000
RLCD-9	9.6	1000
RLCD-11	11.2	1000
RLCD-12	12.7	1000
RLCD-14	14	1000
RLCD-16	16	1000
RLCD-18	18	1000
RLCD-19	19.1	1000

P.C.B Ø3.5
THICKNESS 0.8~2.0

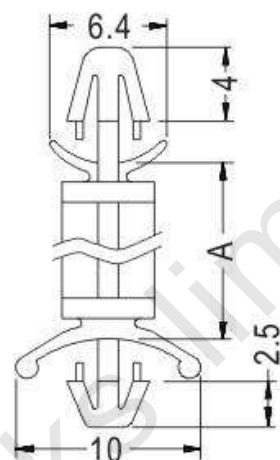

CHASSIS Ø3.5
THICKNESS 0.8~2.0


3.3 RLCS Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C



Part No	A	Package
RLCS-3	3.5	1000
RLCS-5	4.8	1000
RLCS-6	6	1000
RLCS-6A	6.4	1000
RLCS-8	7.9	1000
RLCS-9	9.5	1000
RLCS-11	11.1	1000
RLCS-12	12.7	1000
RLCS-16	15.9	1000
RLCS-19	19.1	1000
RLCS-22	22.2	1000
RLCS-24	24	1000
RLCS-25	25.4	1000
RLCS-27.5	27.5	1000
RLCS-28	28.6	1000
RLCS-31.1	31.1	1000
RLCS-31.7	31.7	1000
RLCS-35	34.9	1000


P.C.B Ø4.0
THICKNESS 1.2~1.7

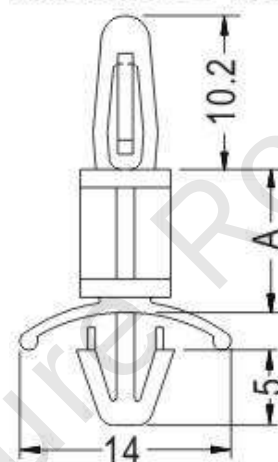

CHASSIS Ø4.8
THICKNESS 0.8~2.0

3.4 RLCC Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

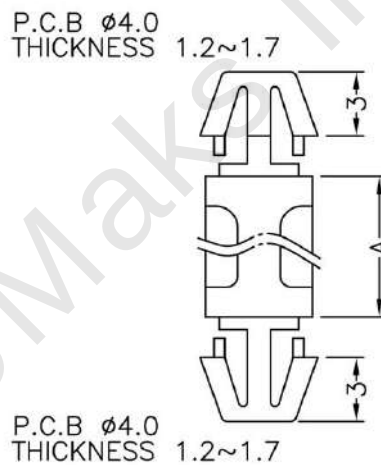


Part No	A	Package	Part No	A	Package	Part No	A	Package
RLCC-3S	3	2000	RLCC-11.5	11.5	1000	RLCC-30	30	1000
RLCC-3	3.5	2000	RLCC-12S	12	1000	RLCC-34	34	1000
RLCC-4	4	2000	RLCC-12	12.7	1000	RLCC-69	69	500
RLCC-5	5	2000	RLCC-14	14	1000	RLCC-71	71.2	500
RLCC-6S	6	2000	RLCC-15	15.9	1000	RLCC-72	72	500
RLCC-6	6.4	1000	RLCC-18	18	1000	RLCC-74	74.2	500
RLCC-8	8	1000	RLCC-19	19	1000	RLCC-80	80	500
RLCC-9.5	9.5	1000	RLCC-20	20	1000			
RLCC-10S	10	1000	RLCC-25	25	1000			
RLCC-10	10.5	1000	RLCC-27	27	1000			

3.5 RMAD Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

Part No	A	Package
RMAD-2	2	2000
RMAD-3	3	2000
RMAD-4	4	2000
RMAD-5	5	2000
RMAD-6	6	2000
RMAD-8	8	2000
RMAD-10	10	2000
RMAD-12	12	2000
RMAD-14	14	2000
RMAD-16	16	2000
RMAD-18	18	2000
RMAD-20	20	2000
RMAD-22	22	2000

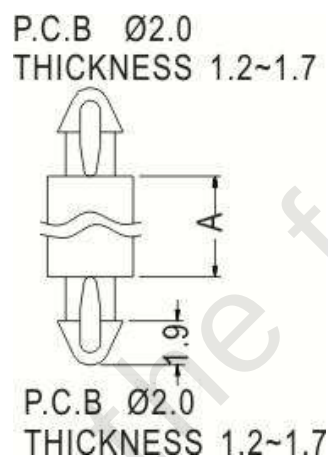


3.6 RMADA Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

Part No	A	Package
RMADA-2	2	2000
RMADA-3	3	2000
RMADA-4	4	2000
RMADA-5	5	2000
RMADA-6	6	2000
RMADA-7	7	2000
RMADA-8	8	2000
RMADA-9	9	2000
RMADA-10	10	2000
RMADA-12	12	2000
RMADA-14	14	2000
RMADA-16	16	2000
RMADA-18	18	2000
RMADA-20	20	2000
RMADA-22	22	2000

P.C.B Ø2.5
THICKNESS 1.6

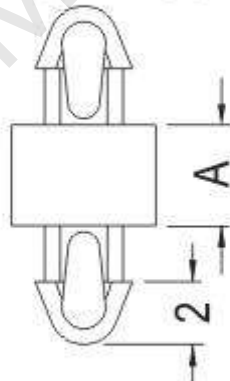

P.C.B Ø2.5
THICKNESS 1.6




3.7 RUCBS Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

Part No	A	Package
RUCBS-5	4.8	1000
RUCBS-6	6.4	1000
RUCBS-9	9.5	1000
RUCBS-12	12.7	1000
RUCBS-15	15.9	1000
RUCBS-19	19.1	1000
RUCBS-22	22.2	1000

P.C.B Ø4.0
THICKNESS 1.2~1.7

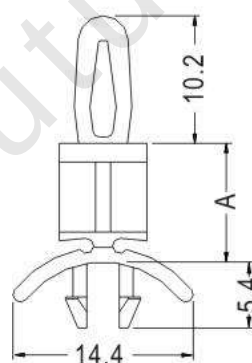


P.C.B Ø4.8
THICKNESS 0.8~2.5



3.8 RULBS Series, round spacer, double locks.

Part No	A	Package
RULCB-6	6.3	1000
RULCB-8	8	1000
RULCB-9	9.5	1000
RULCB-10	10	1000
RULCB-12	12.7	1000
RULCB-16	15.9	1000
RULCB-23	23	1000

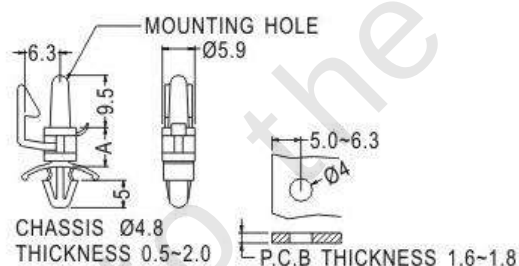


3.8 RLCBT Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

Part No	A	Package
RLCBT-3	3.2	1000
RLCBT-5	4.8	1000
RLCBT-6	6.3	1000
RLCBT-8	8	1000
RLCBT-10	10	1000
RLCBT-12	12	1000
RLCBT-14	14	1000
RLCBT-16	16	1000
RLCBT-18	18	1000
RLCBT-25	25	1000

P.C.B Ø3.0
THICKNESS 1.2~1.7

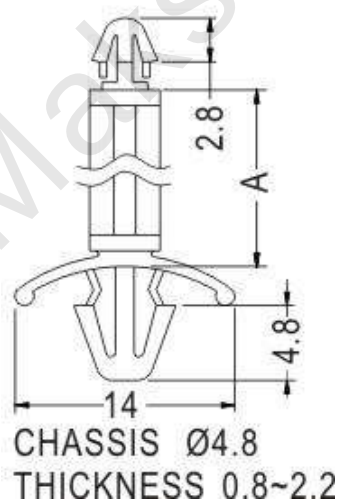


3.9 RLCA Series, round spacer, double locks.

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

Part No	A	Package
RLCA-6	6.3	1000
RLCA-8	8	1000
RLCA-10	10	1000
RLCA-12	12.7	1000

P.C.B Ø3.0
THICKNESS 1.2~1.7

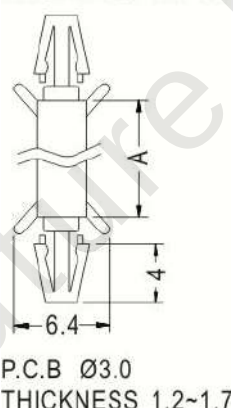

P.C.B Ø3.0
THICKNESS 1.2~1.7




LED Holders/Spacers

4.1 LED Spacer series

Order code - LED-XK, where X outer Diameter (*4, 4.5 or 5 mm)

- * Material: Nylon-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C


PART NO	LED	PACKAGE	PART NO	LED	PACKAGE	PART NO	LED	PACKAGE
LED-XK	1.5	5000PCS	LED-XK	10.0	5000PCS	LED-XK	19.0	2000PCS
	2.0			10.5			19.5	
	2.5			11.0			20.0	
	3.0			11.5			20.5	
	3.5			12.0			21.0	
	4.0			12.5			21.5	
	4.5			13.0			22.0	
	5.0			13.5			22.5	
	5.5			14.0			23.0	
	6.0			14.5			23.5	
	6.5			15.0			24.0	
	7.0			15.5			24.5	
	7.5			16.0			25.0	
	8.0			17.0			25.5	
	8.5			17.5			26.0	
	9.0			18.0				
	9.5			18.5	2000PCS			



4.2 LEDH Spacer series

- * Material: Nylon-66 (Black)
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C


PART NO	L	PACKAGE	PART NO	L	PACKAGE	PART NO	L	PACKAGE
LEDH-1.5	1,5	5000PCS	LEDH-1.5	10,0	5000PCS	LEDH-1.5	18,0	2000PCS
	2,0			10,5			18,5	
	2,5			11,0			19,0	
	3,0			11,5			19,5	
	3,5			12,0			20,0	
	4,0			12,5			20,5	
	4,5			13,0			21,0	
	5,0			13,5			21,5	
	5,5			14,0			22,0	
	6,0			14,5				
	6,5			15,0				
	7,0			15,5				
	7,5			16,0				
	8,0			16,5				
	8,5			17,0				
	9,5			17,5				



4.3 LEDT Spacer series

- * Material: Nylon-66 (Black)
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

PART NO	L	PACKAGE	PART NO	L	PACKAGE	PART NO	L	PACKAGE
LEDT	1,0	5000PCS	LEDT	9,5	5000PCS	LEDT	17,5	2000PCS
	1,5			10,0			18,0	
	2,0			10,5			18,5	
	2,5			11,0			19,0	
	3,0			11,5			19,5	
	3,5			12,0			20,0	
	4,0			12,5			20,5	
	4,5			13,0			21,0	
	5,0			13,5			21,5	
	5,5			14,0			22,0	
	6,0			14,5			22,5	
	6,5			15,0			23,0	
	7,0			15,5			23,5	
	7,5			16,0			24,0	
	8,0			16,5				
	8,5			17,0				






Insulators

5.1 GM Series

- * Material: PVC(Rubber)
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C



PART NO	Dimension					Material	PACKAGE
	φ A	φ B	φ C	D	E		
GM-	8.5	6.0	3.0	1.7	4.4	PVC	1000PCS
	10.2	7.2	5.1	1.7	4.4		
	13.3	10.0	6.4	1.7	6.3		
	16.0	12.0	8.2	1.7	6.1		
	19.5	13.9	10.6	1.7	6.4		
	8.0	4.8	3.2	1.6	6.4	Rubber	2000PCS
	9.5	6.4	4.0	1.6	6.4		1000PCS
	10.8	8.0	4.5	1.6	4.5		
	14.4	9.5	6.3	1.6	7.0		
	14.2	11.0	8.0	1.6	4.8		
	17.5	12.7	9.5	1.6	6.8		500PCS
	22.0	17.5	14.2	1.6	4.8		
	22.0	19.0	16.0	1.6	5.5		
	25.0	19.5	18.0	1.6	6.0		
	31.4	25.2	18.5	1.6	8.0		
	19.5	14.0	6.0	1.0	7.0		250PCS
	15.9	12.7	9.5	1.5	6.4		
	7.9	4.8	3.2	1.6	4.8		
	10.8	8.0	5.0	1.6	4.5		
	13.0	8.4	5.5	3.3	6.3		1000PCS
	13.3	9.0	5.8	2.0	6.2		
	10.4	8.1	3.6	1.15	7.15		
	10.5	7.5	5.2	1.4	5.5		



5.2 KG Series (wire guard sleeve)

- * Material: Nylon 66 (Black or natural colour)
- * Flame class: 94V-2
- * Working temperature: -20°C +80°C

PART NO	Dimension		Chassis Thickness	PACKAGE
	A	B		
KG-008	0.5~0.7	3.1	0.5~0.7	10M
KG-010	0.9~1.1	3.3	0.9~1.1	
KG-012	1.1~1.3	3.5	1.1~1.3	
KG-016	1.5~1.7	4.0	1.5~1.7	
KG-020	1.9~2.1	4.0	1.9~2.1	
KG-024	2.3~2.4	4.6	2.3~2.4	
KG-030	2.9~3.1	5.5	2.9~3.1	
KG-045	3.9~4.4	5.5	3.9~4.4	

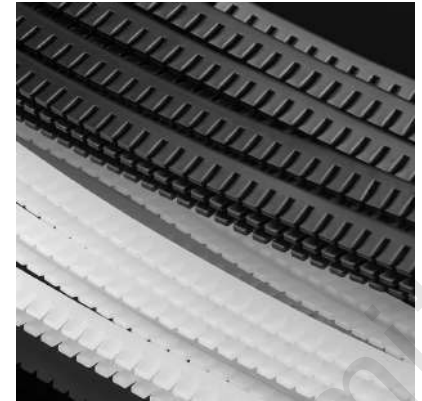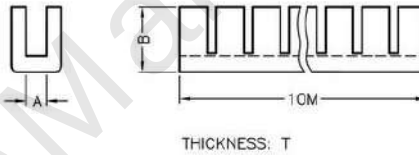

5.3 Cable insulator

- * Material: Nylon 66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C

PART NO	Applicable Wires		Mounting Hole		Chassis Thickness	Dimension			Section Shape	PACKAGE
	Specification	Size	A	B		F	C	D		
2P-4	SPT-1	Φ3X5.6	9.5	8.7	0.8-1.6	10.8	10.4	4.0	Flat Type	1000PCS
3P-4	SPT-1	Φ3X5.6	11.0	9.9	0.8-1.6	12.1	10.4	4.0		
3W-1	SPT-1	Φ3X5.6	11.0	9.9	1.9-2.5	12.5	10.4	3.2		
4N-4	SPT-2	Φ3.71X7.6 Φ3.8X7.6	12.7 13.1	11.8	0.8-1.6	13.9	10.6	4.0		
4K-4	SPT-2	Φ3.71X7.6 Φ3.8X7.6	12.7 13.1	11.8	1.9-2.5	13.7	10.6	4.0	Round Type	400PCS
5N-4	SVT	Φ6.4-7.4	12.7	11.5	0.8-1.6	14.2	10.9	4.2		
5P-4	SVT	Φ6.4-7.4	12.7	11.5	1.9-2.5	14.2	10.9	4.2		
6N-4	SJT3C418	Φ7.6	15.9	14.0	0.8-1.6	17.8	14.8	5.6		
6P-4	SJT3CK18	Φ7.6	15.9	14.0	1.9-2.5	17.6	14.8	5.6		
6N3-4	SJT3C#16	Φ8.2-9.2	15.9	14.0	0.8-1.6	17.3	14.8	5.6		
6P3-4	SJT3CW16	Φ8.2-9.2	15.9	14.0	1.9-3.2	17.3	14.8	5.8		
7N-2	SJT3C#14	Φ9.2-10.5 Φ11.0	19.0 19.8	16.5	0.8-1.6	21.5	19.1	7.8		
7P-2	SJT3CW14	Φ9.2-10.5 Φ11.0	19.0 19.8	16.5	1.9-3.2	21.7	19.4	7.8		



5.4 Cable gland

Thread	PART NO.		Max. Jotni	Thread O.D	Panel Mounting Hole	Thread Length C2	PACKAGE
	(Black)	(Gray)					
M16X1.5	GN16-18B	GN16-18G	18.3	16	16-16.3	15	50PCS
M20X1.5	GN20-18B	GN20-18G	18.3	20	20-20.3	15	
M20X1.5	GN20-21B	GN20-21G	22	20	20-20.3	15	
M25X1.5	GN25-21B	GN25-21G	22	25	25-25.4	15	
M25X1.5	GN25-26B	GN25-26G	26.5	25	25-25.4	15	10PCS
M32X1.5	GN32-34B	GN32-34G	34.5	32	32-32.4	15	
M40X1.5	GN40-42B	GN40-42G	43	40	40-40.4	15	
M50X1.5	GN50-48B	GN50-48G	48	50	50-50.4	22	
M63X1.5	GN63-60B	GN63-60G	61	63	63-63.4	25	2PCS
M90X1.5	GN90-88B	GN90-88G	90	90	90-91	25	
M12X1.5	GN12-10B	GN12-10G	10	12	12-12.3	9	50PCS
M16X1.5	GN16-13B	GN16-13G	13	16	16-16.3	15	
M16X1.5	GN16-15B	GN16-15G	16	16	16-16.3	15	
M16X1.5	GN16-18B	GN16-18G	18.3	16	16-16.3	15	
M20X1.5	GN20-15B	GN20-15G	16	20	20-20.3	15	
M20X1.5	GN20-18B	GN20-18G	18.3	20	20-20.3	15	
M20X1.5	GN20-21B	GN20-21G	22	20	20-20.3	15	
M25X1.5	GN25-21B	GN25-21G	22	25	25-25.4	15	
M25X1.5	GN25-26B	GN25-26G	26.5	25	25-25.4	15	
M25X1.5	GN25-28B	GN25-28G	28.5	25	25-25.4	15	
M32X1.5	GN32-34B	GN32-34G	34.5	32	32-32.4	15	10PCS
M40X1.5	GN40-42B	GN40-42G	43	40	40-40.4	15	
M63X1.5	GN63-54B	GN63-54G	55	63	63-63.4	25	

- * Material: Nylon 66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C



Rubber feet and bumpers

6.1 FC Vibration

Parameter	M3 Version	M2 Version
Thread Type	M3	M2
Rubber Body Height	7 mm	5 mm
Rubber Body Diameter	5.8 mm	4 mm
Threaded Section Length	4.5 mm	4 mm
Thread Depth	3 mm	3 mm
Set Weight	2.5 g	1.1 g



6.2 KH/KOH Series

- * Material: Rubber
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C
- * KH-without inner washer/KOH-with inner washer

PART NO	Specification	PACKAGE
KH-12.5-7	12.5*7.0	200PCS
KH-1307	13*7.0	
KH-1409	14*9.0	
KH-1710	17*10.0	
KH-1805	18*5.0	
KH-18-8	18*8.0	
KH-1910	19*10.0	
KH-2008	20*8.0	
KH-2017	20*17	
KH-21-12	21*12	
KH-2112	21*12	
KH-2210	22*10.0	
KH-25-7	25*7.0	
KH-2515	25*15	
KH-25-25	25*25	
KH-2613	26*13	
KH-31-18	31*18	
KH-3218	32*18	
KH-3333	33*33	
KH-35-32	35*32	
KH-8-12	8*12	
KH-36-20-25	36*20*25	
KH-4022	40*22	
KH-5030	50*30	




PART NO	Specification	PACKAGE
KOH-12.5-7	12.5*7.0	200PCS
KOH-1307	13*7.0	
KOH-1409	14*9.0	
KOH-1710	17*10.0	
KOH-1805	18*5.0	
KOH-18-8	18*8.0	
KOH-1910	19*10.0	
KOH-2008	20*8.0	
KOH-2017	20*17	
KOH-21-12	21*12	
KOH-2112	21*12	
KOH-2210	22*10.0	
KOH-25-7	25*7.0	
KOH-2515	25*15	
KOH-25-25	25*25	
KOH-2613	26*13	
KOH-31-18	31*18	
KOH-3218	32*18	
KOH-3333	33*33	
KOH-35-32	35*32	
KOH-8-12	8*12	
KOH-36-20-25	36*20*25	
KOH-4022	40*22	
KOH-5030	50*30	

6.3 FF Series

- * Material: PVC
- * Flame class: 94V-2
- * Working temperature: -20°C +90°C

PART NO.	Dimension					Chassis Thickness	PACKAGE
	ΦA	ΦB	ΦC	D	E		
FF-1	8.0	20.8	19.8	6.4	11.8	1.0-2.5	200PCS
FF-2	8.0	20.0	18.5	10.2	15.4	1.0-2.5	
FF-3	8.0	23.7	19.5	13.7	19.2	1.0-2.5	
FF-4	8.0	25.0	23.5	6.5	12.5	1.0-2.5	
FF-5	8.0	30.0	27.7	12.8	18.8	1.0-2.5	
FF-6	10.0	28.5	26.5	8.2	14.0	1.0-3.5	
FF-7	5.0	12.7	12.0	4.4	8.5	1.0-2.0	
FF-8	5.0	15.6	15.0	4.6	8.2	1.0-2.0	
FF-9	8.0	20.0	18.6	4.0	7.0	1.0-2.0	
FF-10	8.0	23.8	22.0	5.0	10.0	1.0-2.5	
FF-11	10.0	31.5	28.5	7.8	13.6	1.0-3.5	
FF-12	8.0	20.0	18.0	15.0	20.8	1.0-3.0	
FF-13	7.9	20.0	18.0	18.0	23.8	0.8-1.0	
FF-14	8.0	19.5	18.7	5.0	10.5	0.8-2.0	



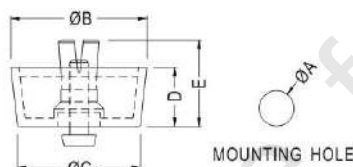


Other product

7.1 Plastic washer WS Series

- * Material: NEYLON-66
- * Flame class: 94V-2
- * Working temperature: -20°C +120°C


PART NO	Dimension			PACKAGE	PART NO	Dimension			PACKAGE
	A	B	C			A	B	C	
WS-	3.7	2.2	1.0	500PCS	WS-	8.0	4.0	1.5	500PCS
	3.7	2.2	1.2			8.0	4.1	0.5	
	4.0	2.5	0.5			8.0	4.1	0.8	
	8.65	4.1	1.0			8.0	4.1	1.0	
	4.2	1.9	0.5			8.0	4.1	1.5	
	4.5	2.0	0.8			8.0	4.1	2.0	
	4.5	2.1	0.8			8.0	4.6	0.3	
	4.5	2.1	0.9			8.0	5.0	1.0	
	4.5	2.1	1.2			8.0	5.0	5.0	
	4.5	2.1	1.7			8.0	5.1	2.0	
	4.5	2.5	0.5			8.0	5.2	0.5	
	5.0	2.1	2.0			8.0	5.5	1.8	
	5.0	2.1	1.0			8.65	4.1	1.0	
	5.0	2.5	1.1			8.8	2.0	1.5	
	5.0	3.1	1.0			9.0	4.5	0.5	
	5.0	3.2	0.5			9.0	2.5	1.0	
	5.6	3.73	0.3			9.0	7.6	2.0	
	6.0	2.3	0.8			9.6	4.4	0.8	
	6.0	2.5	0.5			10.0	5.2	0.8	
	6.0	2.7	3.0			10.0	4.3	4.0	
	6.0	2.9	2.35			10.0	6.4	2.8	
	6.0	3.0	1.5			10.0	5.2	1.0	
	6.0	3.1	0.5			10.0	5.2	2.0	
	6.0	3.1	2.0			11.0	5.2	1.5	
	6.0	3.1	3.4			11.0	7.0	0.8	
	6.0	3.2	1.0			11.3	5.4	1.3	
	6.0	3.2	1.7			11.5	3.5	4.0	
	6.0	3.8	1.0			12.0	5.0	2.0	
	6.0	3.8	1.5			12.0	6.4	1.4	
	6.3	4.2	1.55			12.7	6.48	1.52	
	6.35	2.3	2.5			12.7	6.48	2.0	
	6.35	3.05	1.27			12.7	7.9	1.57	
	6.5	3.25	0.9			12.8	6.4	0.8	
	6.5	3.8	0.5			14.7	11.5	1.0	
	6.5	4.0	1.65			15.0	7.1	1.0	
	6.5	4.0	2.5			15.0	10.3	5.0	
	6.8	4.2	1.0			15.8	7.1	1.5	
	7.0	3.0	1.0			16.0	10.0	0.8	
	7.0	3.0	0.8			16.0	10.0	1.5	
	7.0	3.1	0.5			16.0	11.4	3.2	
	7.0	3.3	2.0			18.0	8.2	1.0	
	7.0	5.0	1.6			19.0	11.0	1.6	
	7.1	3.7	0.5			19.05	14.35	3.18	
	7.5	3.5	0.5			19.5	5.0	1.2	
	8.0	3.1	0.5			20.2	17.8	1.3	
	8.0	3.1	0.8			20.7	10.0	3.0	
	8.0	3.1	1.0			21.8	19.1	0.5	
	8.0	3.1	1.5			23.0	13.0	2.0	
	8.0	3.1	2.0			24.0	8.05	3.0	
	8.0	3.6	2.5			30.0	6.0	1.5	
	8.0	3.6	0.8			45.5	40.0	1.5	

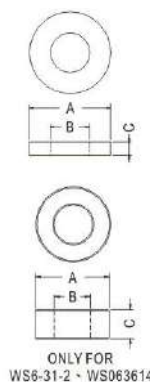

7.2 Cable marker EC Series

- * Material: Nylon-66 (Black)
- * Flame class: 94V-2
- * Working temperature: -20°C +90°C

PART NO	Suitable Wire		Length	Std. Markings	PACKAGE
	Sq	ID			
EC-	16.0/16.0/0.75	2.0~3.2	3.5	0, 1, 2, 3,9	100PCS
	0.75/1.25/2.0/3.5	3.0~4.2	4.0		
	3.5/5.5/8.0	3.6~7.4	5.0		
	8.0/14.0/22.0	5.2~10.0	5.5		

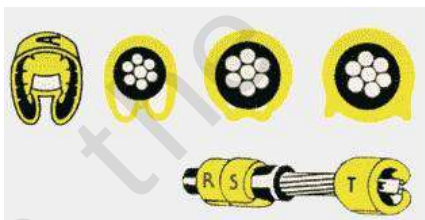


7.3 Transistor cover TC Series

* Material: PBT

* Flame class: 94V-0

* Working temperature: -30°C +180°C

PART NO .	Dimension							PACKAGE
	A	B	C	D	E	ΦF	ΦG	
TC-1	16.0	13.0	5.4	10.7	8.0	3.5	3.4	TO-220
TC-1A	19.3	13.0	5.4	10.7	10.0	3.6	3.4	
TC-1C	17.8	13.0	5.5	10.7	9.3	3.5	3.3	
TC-2	19.0	18.0	6.0	16.4	10.5	3.5	3.5	TO-218
TC-3	28.0	19.0	8.0	16.5	12.8	3.9	2.8	TO-3P
TC-4	16.0	13.0	5.4	10.7	8.0	3.5	3.5	TO-220
TC-5A	16.0	13.0	5.5	10.5	8.0	3.5	3.5	
TC-6	13.0	13.2	6.2	10.7	6.8	3.3	3.3	
TC-7	13.0	13.2	7.0	10.7	6.8	3.3	3.0	
TC-8	20.0	25.4	7.0	22.5	12.7	3.3		TO-220
TC-9	23.0	12.9	8.3	10.8	9.3	3.5	2.8	
TC-10	14.3	13.2	6.2	10.5	8.2	3.3	3.2	
TC-11	14.3	13.2	7.0	10.7	8.2	3.3	2.7	
TC-13	14.3	10.0	4.2		8.1	3.3	3.5	
TC-16	22.5	13.0	5.5	10.5	15.0	3.5	3.5	
TC-18	16.0	13.0	5.4	10.7	8.0	3.5	3.5	TO-220
TC-19	30.0	18.0	6.0	15.7	17.0	3.6	2.8	200PCS
TC-20	30.0	18.0	6.0		17.0	3.6	2.8	TO-220
TC-22	13.0	13.2	6.7	10.7	7.1	3.3	2.8	
TC-23	19.1	15.2	6.1	12.0	11.8	3.5	3.6	




7.4 Spring-loaded screws RPF Series

* Material: Steel 304

	A	T2	C	E	H	T1	G
M2.5*16mm	1.3	15	4	8	5.3	8	8
M3*16mm	1.5	15	6	10	5.3	8	8
M4*16mm	1.5	15	6	10	5.3	8	8
M5*16mm	1.5	15	8	12	6	8	8

	A	T2	C	E	H	T1	G
M3*20mm	1.5	15	6	10	5.3	8	12
M4*20mm	1.5	15	6	10	5.3	8	12
M4*25mm	1.5	15	6	10	5.3	8	17
M5*20mm	1.5	15	8	12	6	8	12
M5*25mm	1.5	15	8	12	6	8	17
M6*20mm	1.5	16	9.5	16	6	11	9
M6*25mm	1.5	16	9.5	16	6	11	14

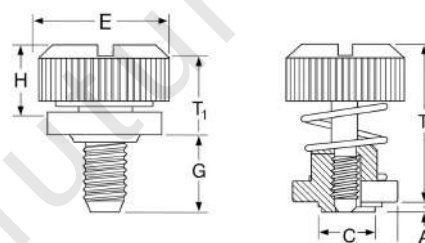

Contact information

Hong Kong

RoMaks limited
Amtel building,
148 Des Voeux road,
Central, Hong Kong

Sales: +85270739304
Email: sales@chipfasteners.com
www.chipfasteners.com
<https://romaks.ltd>

